

LCD Wallmount Assembly Instruction for Installation on walls with wood stud

- WM-100 Applicable monitor weight 3,5kg to 8,5kg
- WM-200 Applicable monitor weight 8,5kg to 13,5kg

Package content

- | | |
|------------------------|----|
| a. Wallmount unit | x1 |
| b. Nylon Anchor | x4 |
| c. M3,5 tapping screw | x4 |
| d. M4x10mm thumb screw | x4 |
| e. Scale sticker | x1 |

Assembly Instruction

- Step 1. Use a high quality stud sensor to locate a stud. It is a good idea to verify the stud location with an awl or thin nail as shown in Fig. 1.
- Step 2. Use supplied scale sticker as a template to mark the center two holes locations on the wall. Make sure these holes are aligned vertically and centered over the stud.
- Step 3. Pre-drill the two holds to a depth of 2" using a 3/16" drill bit. Attach the wallmount to the wall using two supplied M3.5 tapping screw.
- Step 4. Use supplied thumbscrew to secure LCD monitor in place. If necessary, adjust wallmount angle for optimal thumbscrew access.




Fig 2






FIG.4

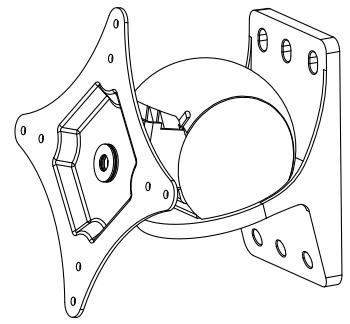

Note:

Hardware for wood stud and solid wall mounting is provided. For all other mounting applications contact a local contractor or hardware store for assistance.

acrobak
www.acrobak.com

LCD Wallmount Assembly Instruction for Installation on walls with wood stud

- WM-100 Applicable monitor weight 3,5kg to 8,5kg
- WM-200 Applicable monitor weight 8,5kg to 13,5kg

Package content

- | | |
|------------------------|----|
| a. Wallmount unit | x1 |
| b. Nylon Anchor | x4 |
| c. M3,5 tapping screw | x4 |
| d. M4x10mm thumb screw | x4 |
| e. Scale sticker | x1 |

Assembly Instruction

- Step 1. Use a high quality stud sensor to locate a stud. It is a good idea to verify the stud location with an awl or thin nail as shown in Fig. 1.
- Step 2. Use supplied scale sticker as a template to mark the center two holes locations on the wall. Make sure these holes are aligned vertically and centered over the stud.
- Step 3. Pre-drill the two holds to a depth of 2" using a 3/16" drill bit. Attach the wallmount to the wall using two supplied M3.5 tapping screw.
- Step 4. Use supplied thumbscrew to secure LCD monitor in place. If necessary, adjust wallmount angle for optimal thumbscrew access.




Fig 2






FIG.4

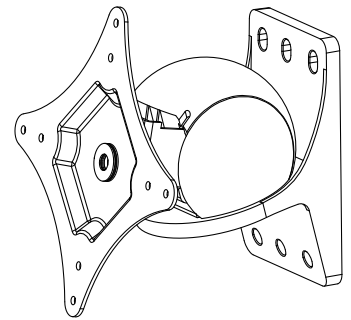

Note:

Hardware for wood stud and solid wall mounting is provided. For all other mounting applications contact a local contractor or hardware store for assistance.

acrobak
www.acrobak.com